

# SMD High Frequency Power Inductor


## Designed for VRM 9.x, 10.x, & 11.x Applications

### FEATURES

- Recommended for use with all major Voltage Regulator ICs.
- High Current handling capability in the smallest footprint.
- Up to 2MHz operating frequency.
- Extended operating temperature range: -40°C to 125°C.
- Robust SMD package capable of handling the most aggressive SMT assembly process.
- RoHS compliant version available.

### APPLICATIONS

- VRM 9.x, 10.x, and 11.x based designs
- Multi-Phase Voltage regulator designs
- Server, Desktop, PDA, Graphics cards, Notebook computers, DDR, telecom switches and routers
- DC-DC converters, Battery powered devices, high current power supplies
- High Current NPUs in networking equipment
- Point-of-load Modules
- DCR sensing

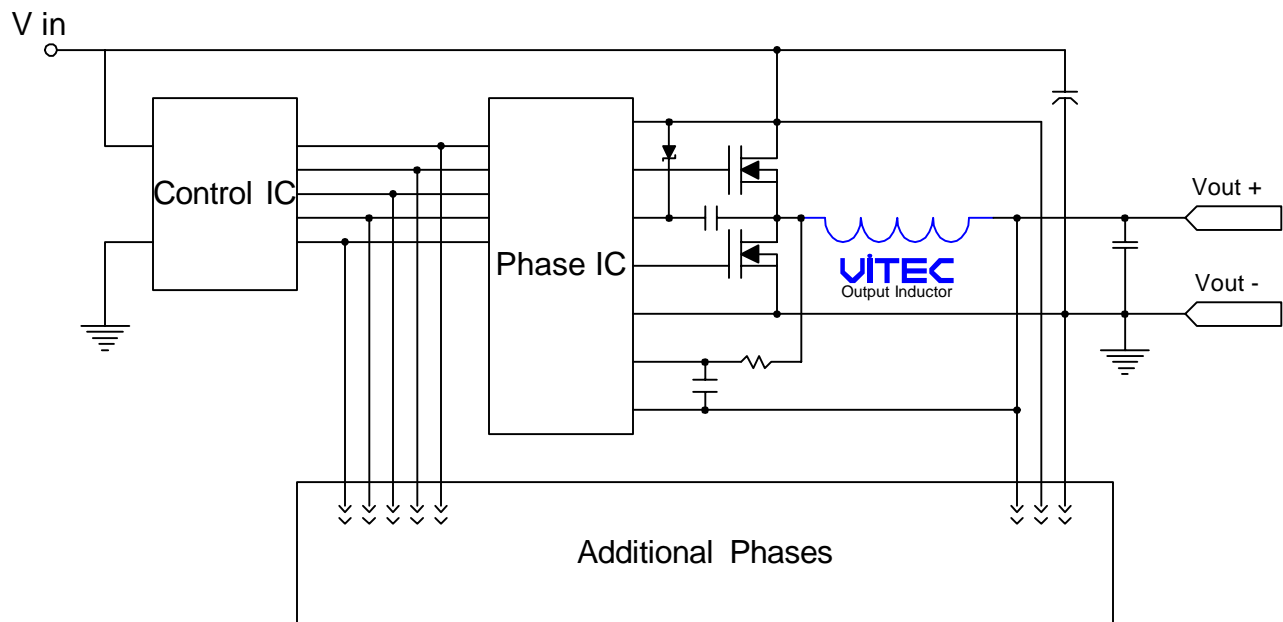


Typical Multi-Phase Application Circuit for a Buck Converter


# SMD High Frequency Power Inductor

## Designed for VRM 9.x, 10.x, & 11.x Applications

### PACKAGE




PART NUMBER	DIM A (MAX)
59P61-320	.201 [5.10]
59P61-580	.195 [4.96]
59P61-720	.195 [4.96]
59P61-101	.195 [4.96]
59P61-151	.195 [4.96]
59P61-201	.195 [4.96]

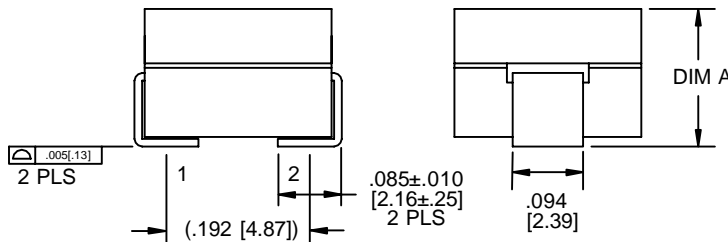


Dimensions: Inches [mm]. Tolerances: 0.XX" +/- 0.01 [0.25] 0.XXX" +/- 0.005" [0.13mm] unless otherwise noted

### SCHEMATIC



### SUGGESTED PCB LAYOUT



Drawing NOT to scale

### ELECTRICAL CHARACTERISTICS @ 25°C (unless otherwise noted)

Part Number		Inductance @ 0 ADC (4)	Inductance @ Isat 25°C (4)(2)	DCR	Isat Max Saturation Current (2)			Temp. Rise Current (3)	Temp. Rise Factor A (5)	Temp. Rise Factor B (5)	Temp. Rise Factor C (5)
					ADC	ADC	ADC				
Classic	RoHS	nH ± 15%	nH MIN	mOhm ± 6.5%	25°C	100°C	125°C	ADC MAX			
59P61-320	59PR61-320	32	22	0.32	112	92	85	34	3.38	0.001938	0.01464
59P61-580	59PR61-580	58	39	0.32	76	63	59	34	3.38	0.001818	0.02363
59P61-720	59PR61-720	72	49	0.32	58	48	45	34	3.38	0.001798	0.03101
59P61-101	59PR61-101	100	68	0.32	44	37	34	34	3.38	0.001784	0.04314
59P61-151	59PR61-151	150	102	0.32	30	25	23	34	3.38	0.001770	0.06482
59P61-201	59PR61-201	200	136	0.32	21	18	16	34	3.38	0.001766	0.08642

Add an "R" to the part number after "P" for the RoHS compliant version (i.e. 59PR61-320 is the RoHS compliant version of 59P61-320).

- The Rated Current (I<sub>rated</sub>) is either the Saturation Current at 25°C or the Temperature Rise Current; the lowest number of the two specified currents.
- The Saturation Current (I<sub>sat</sub>) is the current at which the Inductance drops by a maximum of 20% below the lower limit of its value specified at 0 ADC Bias. Inductance at I<sub>sat</sub> is measured at the specified Ambient Temperature by applying DC Bias by a short period of time to minimize the self-heating effect of the component.
- The Temperature Rise Current is the current at which the temperature of the part increases by 50°C. This test is performed with the part mounted on a PCB with traces having 1.7 times the cross sectional area of the copper leads of the part. The temperature of the part is measured after applying the DC current for a minimum of 10 minutes.
- Inductance is measured at 100 KHz and 1.0 Vrms.
- Temperature Rise can be estimated using the following formulas:

$$T_{rise} (°C) = \left( \frac{\text{Core Loss} + \text{DCR Loss}}{\text{TRF A}} \right)^{0.833}$$

$$\text{DCR Loss (mW)} = \left( I_{dc}^2 + \left( \frac{\Delta I}{2} \right)^2 \right) \times \text{TYP DCR (mOhms)}$$


$$\text{Core Loss (mW)} = \text{TRF B} \times (F)^{1.84} \times (\text{TRF C} \times \Delta I)^{2.28}$$

IDC = DC output current (ADC)  
 Δ I = Delta I across the inductor (Amps)  
 F = Switching frequency (kHz)


# SMD High Frequency Power Inductor

Designed for VRM 9.x, 10.x, & 11.x Applications


59PR61-320 Inductance vs. Idc

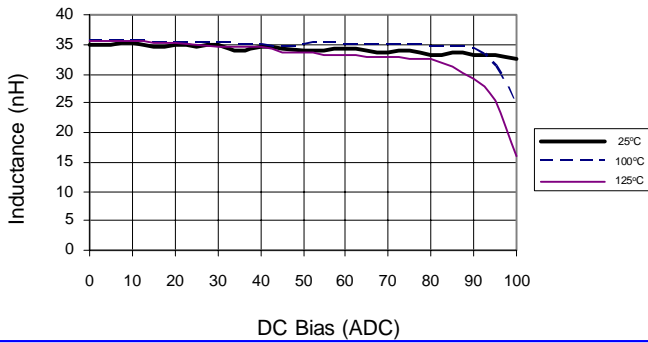


59PR61-580 Inductance vs. Idc

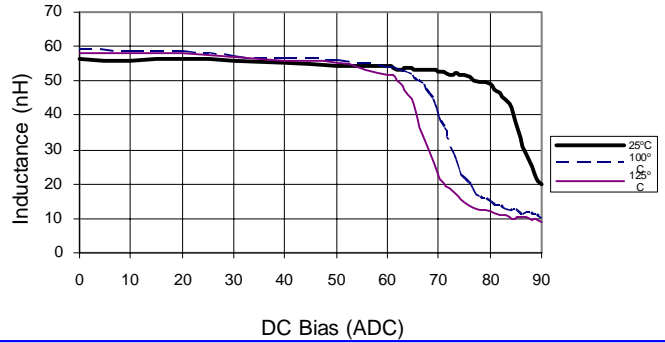


59PR61-720 Inductance vs. Idc

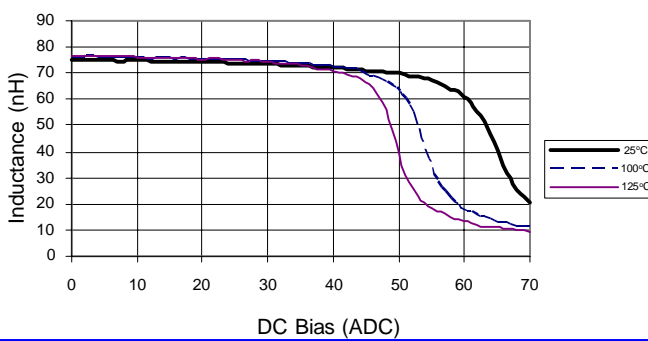


59PR61-101 Inductance vs. Idc

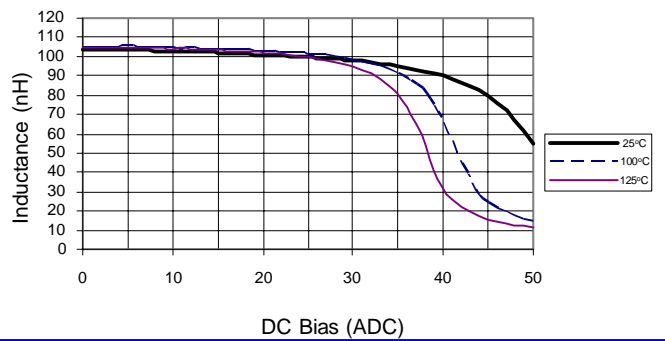


59PR61-151 Inductance vs. Idc

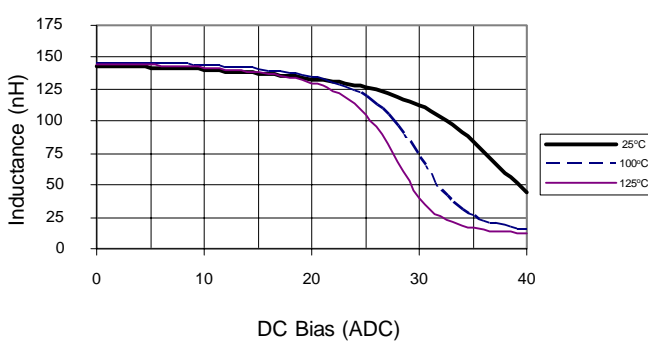


59PR61-201 Inductance vs. Idc

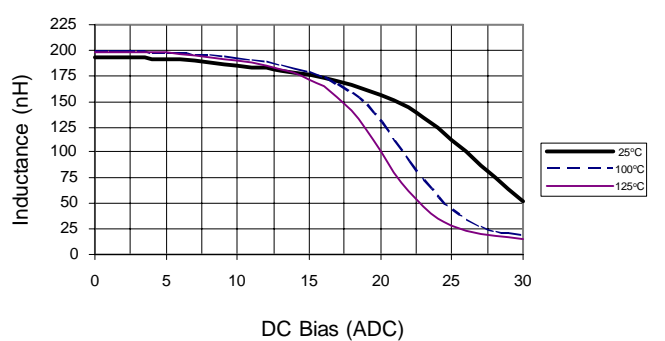

59PR61-XXX Temp. Rise vs. Idc

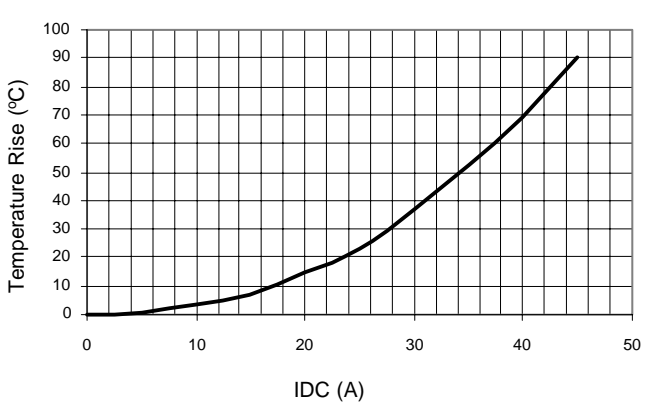


59PR61-XXX Rdc vs. Temperature

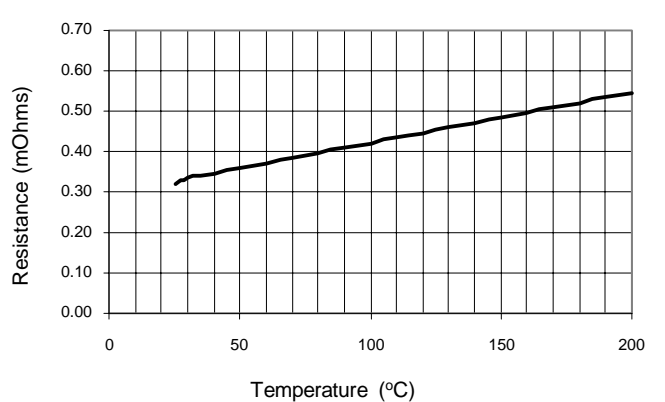


# SMD High Frequency Power Inductor

## Designed for VRM 9.x, 10.x, & 11.x Applications

### IR Profile

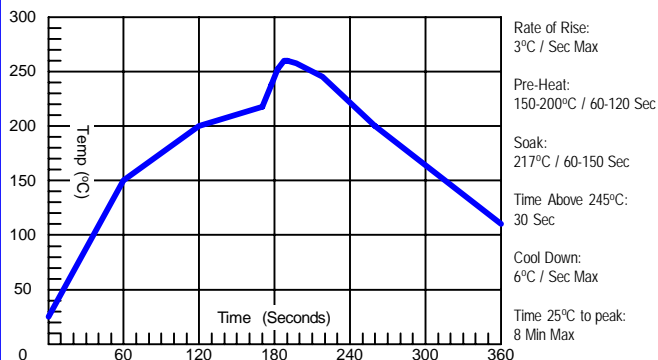

### Tape and Reel

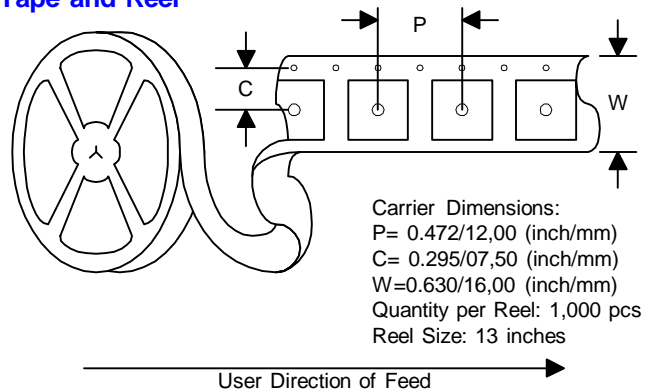

### ENVIRONMENTAL & RELIABILITY DATA

Storage Temperature: -40°C to +125°C  
Operating Temperature: -40°C to +125°C  
Resistance to Solder Reflow: 3 passes thru. +245°C for 30 seconds minimum

Marking permanency: Tested per JESD22-B107-A  
Solderability: Tested per MIL-STD-750D  
Life Test: Tested per MIL-STD-202F, Method 108A  
Thermal Cycle: Tested per JESD22-B104-B, Test Condition G

### ABOUT US

Vitec Electronics Corporation, founded in 1986, is a worldwide leader in the design, manufacture and sale of magnetic solutions. Vitec's market focus includes the power, power conditioning, telecom, networking, communications and computing. Vitec has also established strong alliances with chip manufacturers whereby magnetic solutions are designed in conjunction with unique silicon requirements and are offered as reference designs by the chip companies.

With its Corporate Headquarters and Research & Development center located in Carlsbad, California, and its state of the art manufacturing facility and material sourcing in China, Vitec is uniquely positioned to supply the latest technology at the lowest cost. Vitec offers both standard and custom product design capabilities with all of its facilities being ISO certified.

### QUALITY POLICY

Vitec will provide products and services that meet or exceed our Customer's requirements, conform to company policies and standards, and exhibit continuously improving levels of Quality.

### COMMITMENT

VITEC Electronics empowers each of its employees by providing a business environment that encourages a commitment to excellence, a sense of ownership and personal accountability to all Vitec Customers.

Competitive Pricing, Quality Products, and On Time Deliveries are expected from today's World Class Magnetics Suppliers. The high standards of today's customer are strengthening the dedication and commitment of VITEC Electronics to provide Total Customer Service.

### CONTACT US

USA

VITEC ELECTRONICS CORPORATION  
6213 El Camino Real  
Carlsbad, CA 92009  
U.S.A.

TEL: +1 (760) 918-8831  
FAX: +1 (760) 918-8840

ASIA

SHANGHAI VITEC ELECTRONICS CO., LTD.  
3369 He Chuan Road  
Min Hang District, Shanghai, 201103  
China

TEL: +86 (21) 6446-4828  
FAX: +86 (21) 6446-4865