

# SMD High Frequency Power Inductor


## Designed for VRM 9.x, 10.x, & 11.x Applications

### FEATURES

- Recommended for use with all major Voltage Regulator ICs.
- High Current handling capability in the smallest footprint.
- Up to 2MHz operating frequency.
- Extended operating temperature range: -40°C to 125°C.
- Robust SMD package capable of handling the most aggressive SMT assembly process.
- RoHS compliant version available.

### APPLICATIONS

- VRM 9.x, 10.x, and 11.x based designs
- Multi-Phase Voltage regulator designs
- Server, Desktop, PDA, Graphics cards, Notebook computers, DDR, telecom switches and routers
- DC-DC converters, Battery powered devices, high current power supplies
- High Current NPUs in networking equipment
- Point-of-load Modules
- DCR sensing

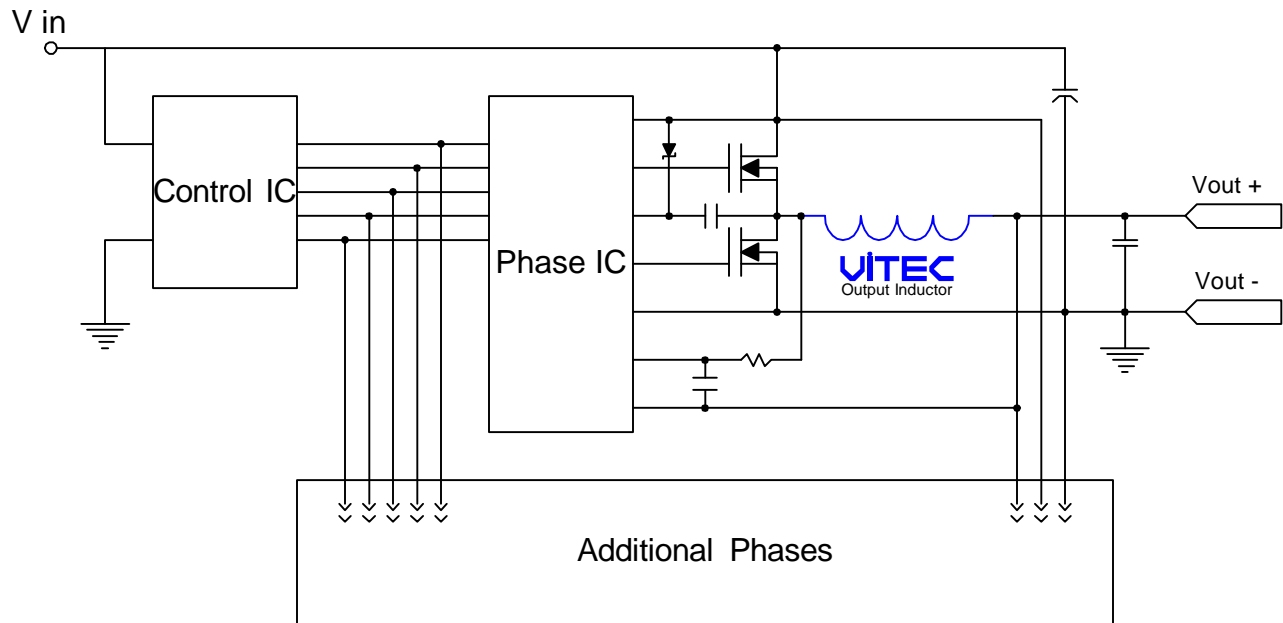


Typical Multi-Phase Application Circuit for a Buck Converter


# SMD High Frequency Power Inductor

## Designed for VRM 9.x, 10.x, & 11.x Applications

### PACKAGE




Note: Due to the mechanical dimension of the product, the prefix (59P) is omitted from the marking. 59P59-xxx series will be marked 59-xxx and 59PR59-xxx series will be marked R59-xxx.

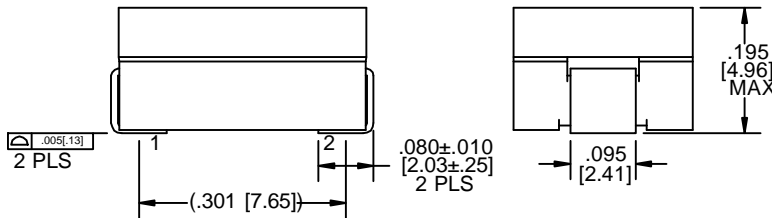


Dimensions: Inches [mm]. Tolerances: 0.XX" +/- 0.01 [0.25] 0.XXX" +/- 0.005" [0.13mm] unless otherwise noted

### SCHEMATIC



### SUGGESTED PCB LAYOUT



Drawing NOT to scale

### ELECTRICAL CHARACTERISTICS @ 25°C (unless otherwise noted)

Part Number		Inductance @ 0 ADC (4)	Inductance @ Isat 25°C (4)(2)	DCR	Isat Max Saturation Current (2)			Temp. Rise Current (3)	Temp. Rise Factor A (5)	Temp. Rise Factor B (5)	Temp. Rise Factor C (5)
					ADC	ADC	ADC				
Classic	RoHS	nH ± 15%	nH MIN	mOhm ± 7.7%	25°C	100°C	125°C	ADC MAX			
59P59-850	59PR59-850	85	58	0.39	70	65	60	33	3.88	0.002671	0.02484
59P59-101	59PR59-101	100	68	0.39	61	55	52	33	3.88	0.002650	0.02928
59P59-121	59PR59-121	120	82	0.39	50	46	43	33	3.88	0.002639	0.03517
59P59-151	59PR59-151	150	102	0.39	40	37	35	33	3.88	0.002626	0.04400
59P59-181	59PR59-181	180	122	0.39	33	30	28	33	3.88	0.002616	0.05284
59P59-221	59PR59-221	220	150	0.39	27	25	23	33	3.88	0.002606	0.06465

Add an "R" to the part number after "P" for the RoHS compliant version (i.e. 59PR59-101 is the RoHS compliant version of 59P59-101).

- The Rated Current (I<sub>rated</sub>) is either the Saturation Current at 25°C or the Temperature Rise Current; the lowest number of the two specified currents.
- The Saturation Current (Isat) is the current at which the Inductance drops by a maximum of 20% below the lower limit of its value specified at 0 ADC Bias. Inductance at Isat is measured at the specified Ambient Temperature by applying DC Bias by a short period of time to minimize the self-heating effect of the component.
- The Temperature Rise Current is the current at which the temperature of the part increases by 50°C. This test is performed with the part mounted on a PCB with traces having 1.7 times the cross sectional area of the copper leads of the part. The temperature of the part is measured after applying the DC current for a minimum of 10 minutes.
- Inductance is measured at 100 KHz and 1.0 Vrms.
- Temperature Rise can be estimated using the following formulas:

$$T_{rise} (^{\circ}C) = \left( \frac{\text{Core Loss} + \text{DCR Loss}}{\text{TRF A}} \right)^{0.833}$$

$$\text{DCR Loss (mW)} = \left( I_{dc}^2 + \left( \frac{\Delta I}{2} \right)^2 \right) \times \text{TYP DCR (mOhms)}$$


$$\text{Core Loss (mW)} = \text{TRF B} \times (F)^{1.84} \times (\text{TRF C} \times \Delta I)^{2.28}$$

IDC = DC output current (ADC)  
 Δ I = Delta I across the inductor (Amps)  
 F = Switching frequency (kHz)


# SMD High Frequency Power Inductor

Designed for VRM 9.x, 10.x, & 11.x Applications


59PR59-850 Inductance vs. Idc

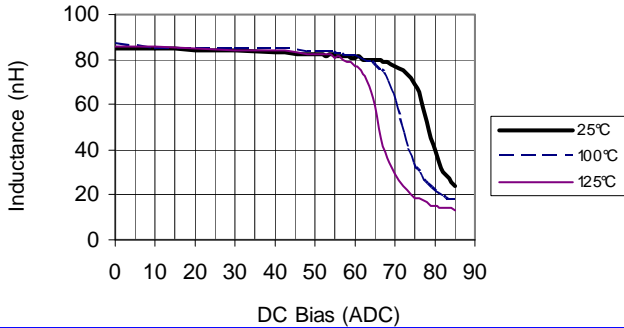


59PR59-101 Inductance vs. Idc

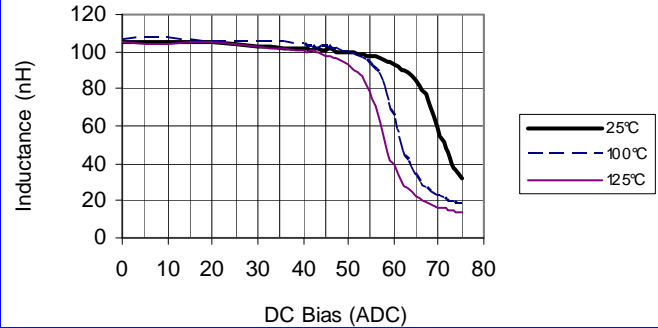


59PR59-121 Inductance vs. Idc

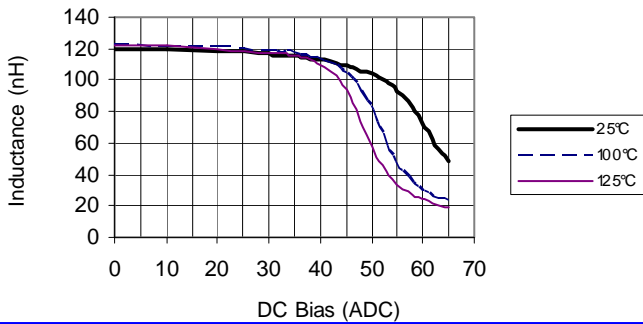


59PR59-151 Inductance vs. Idc

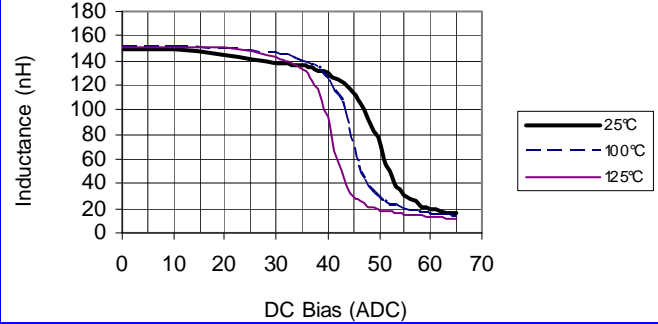


59PR59-181 Inductance vs. Idc

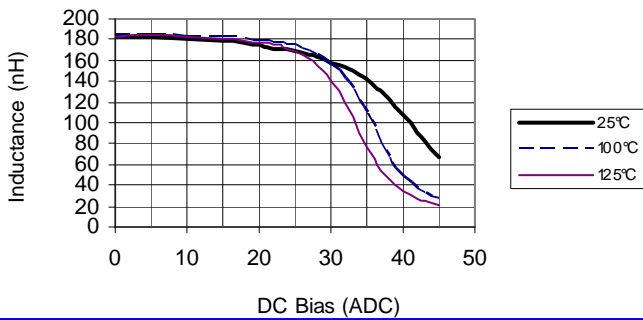


59PR59-221 Inductance vs. Idc

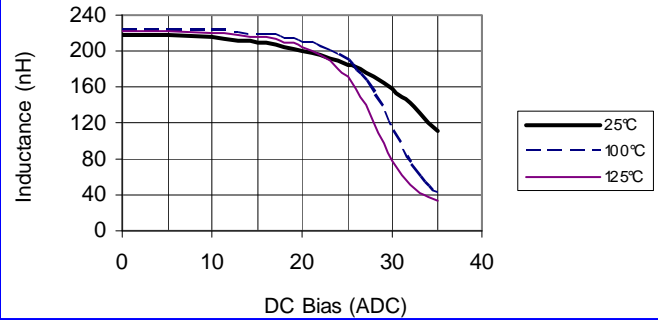

59PR59-XXX Temp. Rise vs. Idc

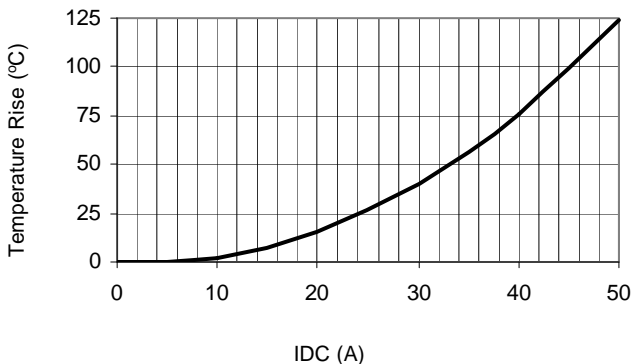


59PR59-XXX Rdc vs. Temperature

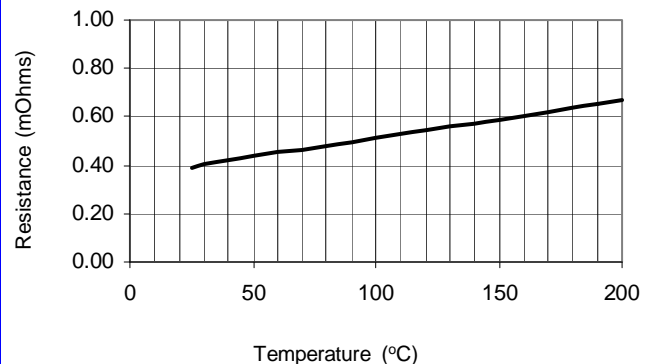


# SMD High Frequency Power Inductor

## Designed for VRM 9.x, 10.x, & 11.x Applications

### IR Profile

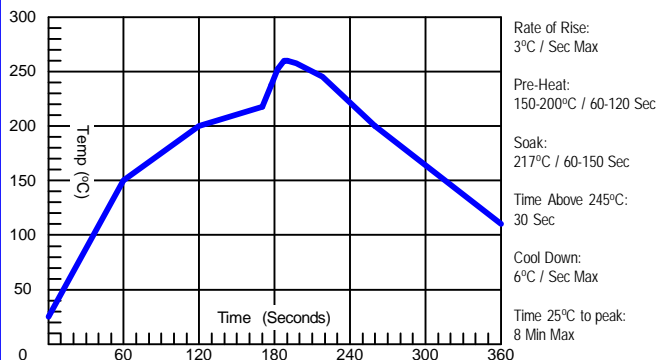

### Tape and Reel

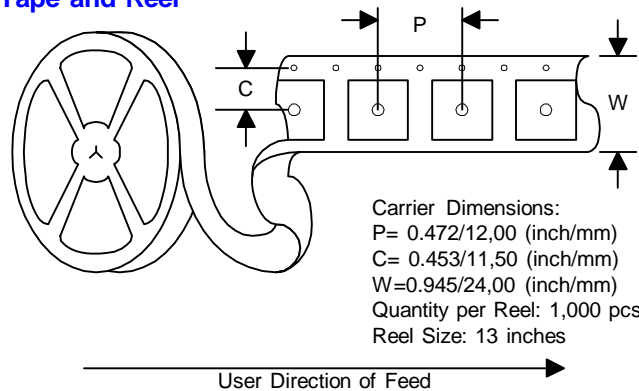

### ENVIRONMENTAL & RELIABILITY DATA

Storage Temperature: -40°C to +125°C  
Operating Temperature: -40°C to +125°C  
Resistance to Solder Reflow: 3 passes thru. +245°C for 30 seconds minimum

Marking permanency: Tested per JESD22-B107-A  
Solderability: Tested per MIL-STD-750D  
Life Test: Tested per MIL-STD-202F, Method 108A  
Thermal Cycle: Tested per JESD22-B104-B, Test Condition G

### ABOUT US

Vitec Electronics Corporation, founded in 1986, is a worldwide leader in the design, manufacture and sale of magnetic solutions. Vitec's market focus includes the power, power conditioning, telecom, networking, communications and computing. Vitec has also established strong alliances with chip manufacturers whereby magnetic solutions are designed in conjunction with unique silicon requirements and are offered as reference designs by the chip companies.

With its Corporate Headquarters and Research & Development center located in Carlsbad, California, and its state of the art manufacturing facility and material sourcing in China, Vitec is uniquely positioned to supply the latest technology at the lowest cost. Vitec offers both standard and custom product design capabilities with all of its facilities being ISO certified.

### QUALITY POLICY

Vitec will provide products and services that meet or exceed our Customer's requirements, conform to company policies and standards, and exhibit continuously improving levels of Quality.

### COMMITMENT

VITEC Electronics empowers each of its employees by providing a business environment that encourages a commitment to excellence, a sense of ownership and personal accountability to all Vitec Customers.

Competitive Pricing, Quality Products, and On Time Deliveries are expected from today's World Class Magnetics Suppliers. The high standards of today's customer are strengthening the dedication and commitment of VITEC Electronics to provide Total Customer Service.

### CONTACT US

USA

VITEC ELECTRONICS CORPORATION  
6213 El Camino Real  
Carlsbad, CA 92009  
U.S.A.

TEL: +1 (760) 918-8831  
FAX: +1 (760) 918-8840

ASIA

SHANGHAI VITEC ELECTRONICS CO., LTD.  
3369 He Chuan Road  
Min Hang District, Shanghai, 201103  
China

TEL: +86 (21) 6446-4828  
FAX: +86 (21) 6446-4865