


TYPE 57P97


Current Sense Transformers

FEATURES


- Operating temperature from -40°C to 130°C.
- Manufactured to UL recognized 130°C (B) insulation system.
- Materials meet flammability requirements for UL 94V-0.
- Frequency range from 10 KHz to 300 KHz.
- RoHS compliant component.

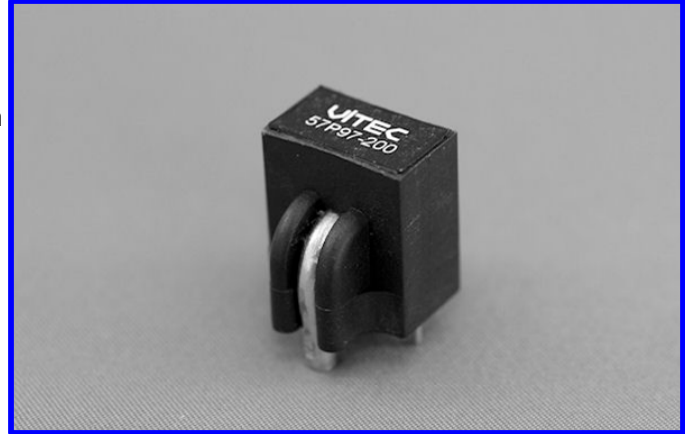


DRAWING

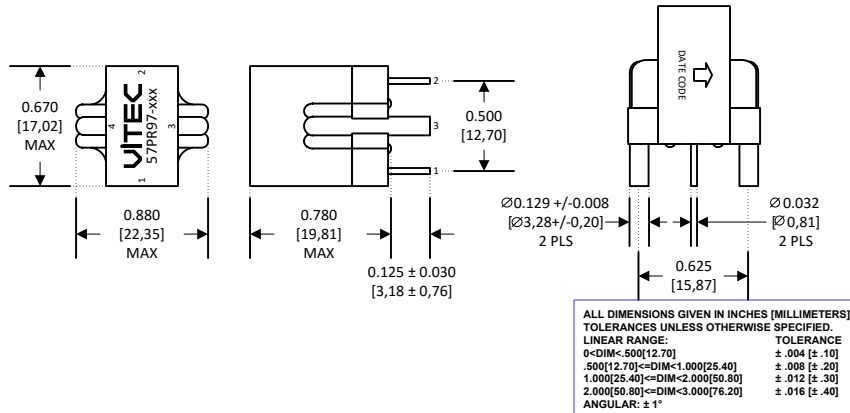

SCHEMATIC



SUGGESTED PCB LAYOUT

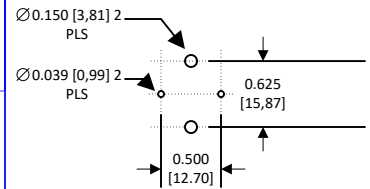

ELECTRICAL CHARACTERISTICS @ 25°C

Part Number	Secondary Inductance ⁽¹⁾	Turns Ratio	Primary DCR	Secondary DCR	Hipot (Pri-Sec)	Rated Current (Primary)
	mH	Ns:Np	mOhm	Ohm	VRMS	A RMS
	+/- 30%	+/- 1%	MAX	MAX	60 Hz 2 SEC	@ 40°C Trise
57PR97-200	118	200:1	0.10	4.00	4800	70

Notes: (1). Tested at 10 KHz, 0.1 VRMS.

To determine maximum operation parameters for unipolar current, use the following formulas:

1. Terminating resistor: $R_t = (N_s \times V_{ref}) / (N_p \times I_{ppk})$
2. Maximum flux density (Teslas): $B_{pk} = (V_{ref} \times Du_{Cy_max}) / (N_s \times 1.488E-5 \times Freq)$
 Recommended $B_{pk_max} = 0.200 T [2000 G]$

RoHS

