
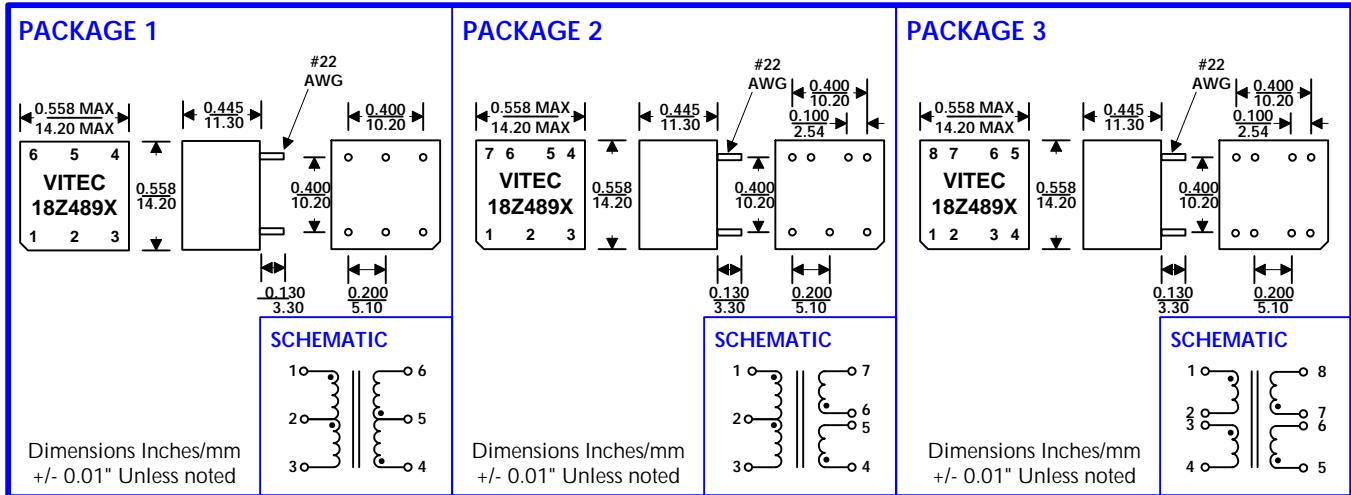


TYPE 18Z - SINGLE THROUGH-HOLE TRANSFORMERS

ISDN-S Interface

FEATURES

- Designed for ISDN S/T telecom applications.
- Meets CCITT I.430 pulse template.
- 1500 Vrms, basic insulation per IEC 950:1991, Mod. EN60950:1992 +A1 +A2:1993, EN41003:1990
- BABT BS EN60950 approval # 1810.

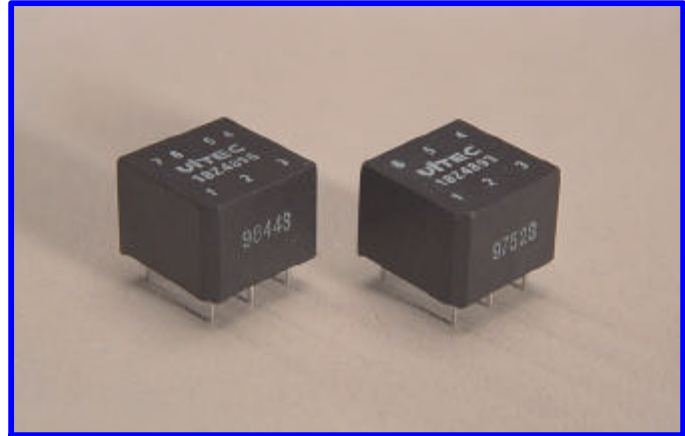

ELECTRICAL CHARACTERISTICS @ 25°C

Part Number	Turns Ratio	OCL	Pri/Sec LL	Pri/Sec Cc	Primary DCR	Secondary DCR	Package
	Ratio	mH	uH	pF	Ohms	Ohms	
	+/- 5%	MIN	MAX	MAX	+/- 25%	+/- 25%	
18Z4893	1CT:1CT	22	10	130	2.4	2.4	1
18Z4894	1CT:1.8SCT	22	10	120	2.4	4.2	2
18Z4895	1CT:2CT	22	15	120	2.5	4.6	1
18Z4896	1CT:2.5SCT	22	12	125	2.5	5.5	2
18Z4897	1CT:2CT	22	35	120	2.5	4.8	1
18Z4898	1SCT:2.5SCT	22	40	100	2.5	5.8	3
18Z4899	1CT:2CT	22	11	100	2.4	4.4	1