
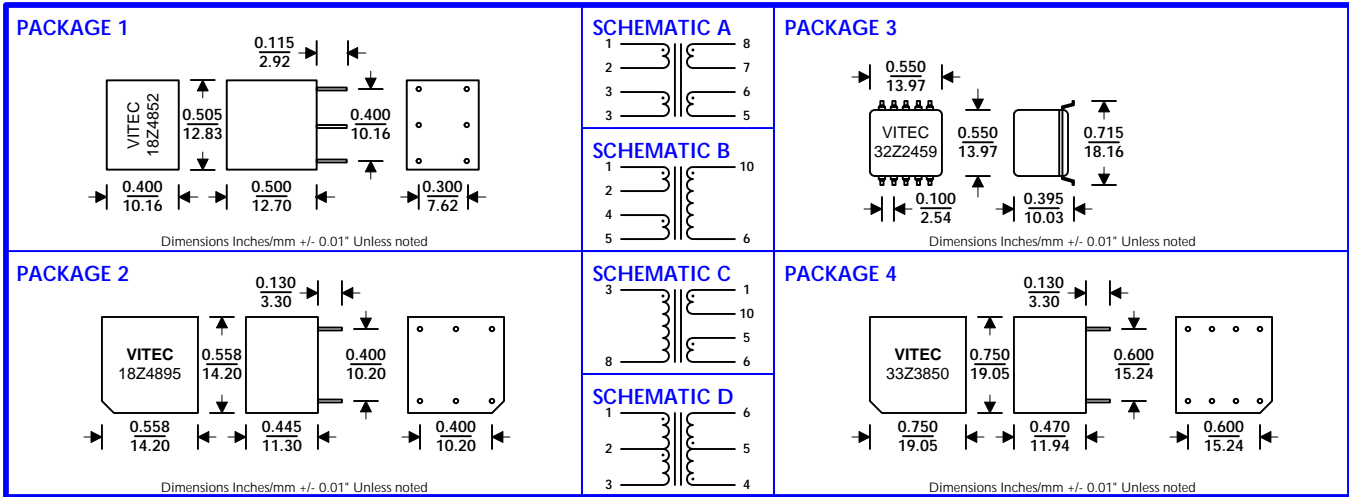


# INTERFACE TRANSFORMERS

## ISDN-Upo, ISDN-Upn and ISDN-S

### FEATURES

- Products matched to Siemens transceiver chips.
- Both SMD and Through Hole packages available.
- Common footprints & pinouts.
- Low cost

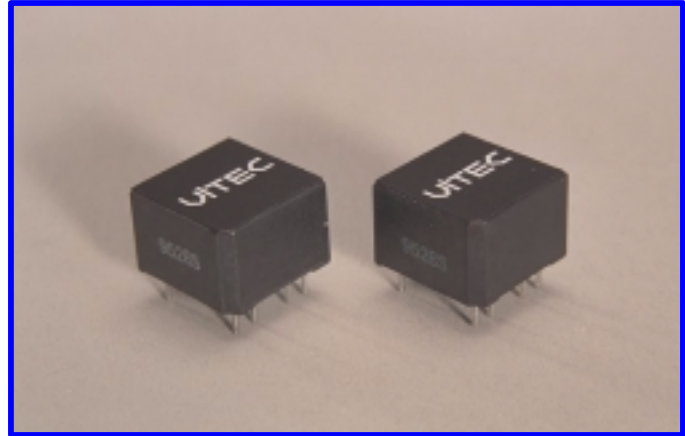

### ELECTRICAL CHARACTERISTICS @ +25°C

Part Number	Turns Ratio	Induct.	Current	Pri DCR	Sec DCR	Isolation	Type	Mounting	Primary Pins	Package/ Schematic					
	Ratio										mH	DC	Ohms	Ohms	Vrms
	+/- 5%										MIN	MAX	MIN	MAX	MIN
<b>ISDN Upo and ISDN Upn Transformers</b>															
33Z3850	1.25SCT:1SCT	4.2 +/--10%	80	2.9	2.4	1500	Single Xfmr	THT	1-4	4/A					
32Z2459	1SCT:1.25	1.7	60	1.6	2.4	1500	Single Xfmr	SMT	1-5	3/B					
<b>ISDN S Transformers</b>															
18Z4852	1SCT:2	22	1	2.5 +/--25%	5.0 +/--25%	2000	Single Xfmr	THT-Vert	1-6	1/C					
18Z4895	1CT:2CT	22	1	2.5 +/--25%	4.6 +/--25%	1500	Single Xfmr	THT	1-3	2/D					